

One Blue Hill Plaza, 16th Floor, PO Box 1546

Pearl River, NY 10965

1-800-PC-AMERICA, 1-800-722-6374

(Voice) 845-920-0800 (Fax) 845-920-0880

HP TPG-A794 Installation




TPG A794 Minidriver Installation

Printer install files can be downloaded at:


- http://download2.pcamerica.com/drivers/HP_A794.zip




1. Unzip HP_A794.zip. (Those are the driver files.)
2. Select **start** then **settings** and finally **Printers and Faxes**.
3. Select **Add Printer**.
4. Select **Next**.

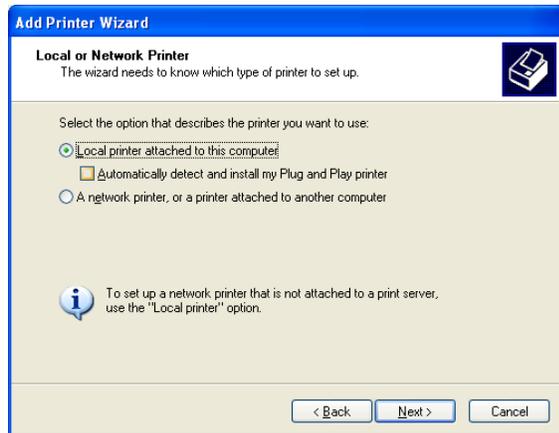


5. Select **local Printer attached to this computer** and select **Next**.

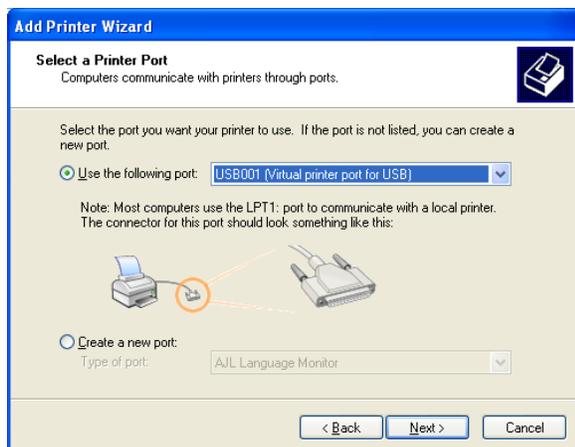


6. Select which ever port the printer is connected to and select **Next** (e.g. USB001).

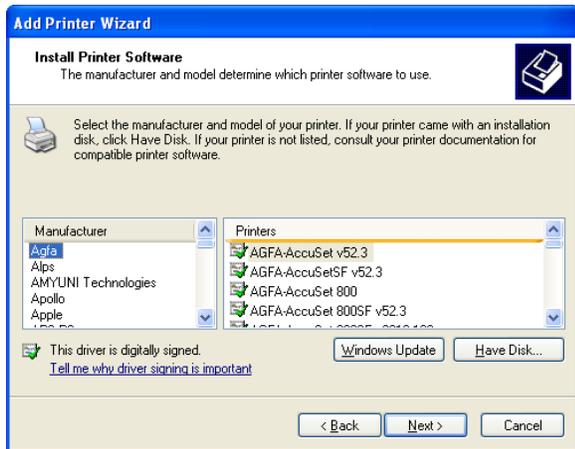

7. Select **Have Disk**.

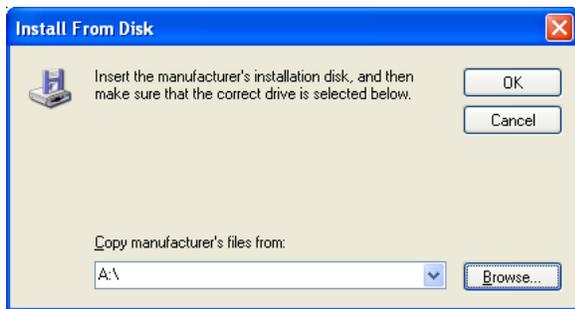


8. Select **Browse** and find the folder you extracted the setup files to.

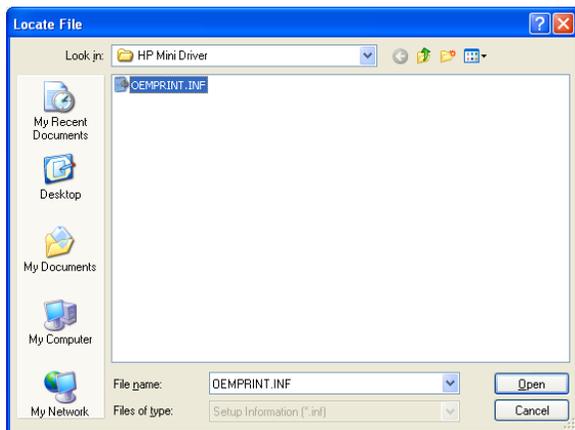


9. Select the .INF file (**OEMPRINT.INF**).


10. Select **Open**.

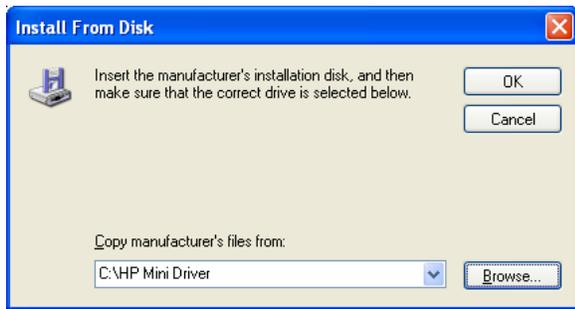

11. Select **Ok**.

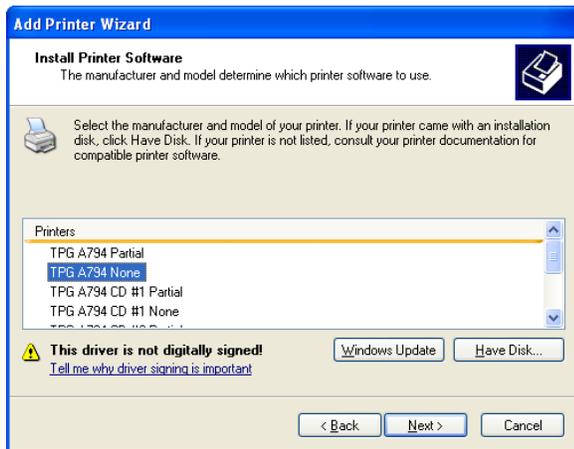

12. Select the **TPG A794 None** then select **Next**.

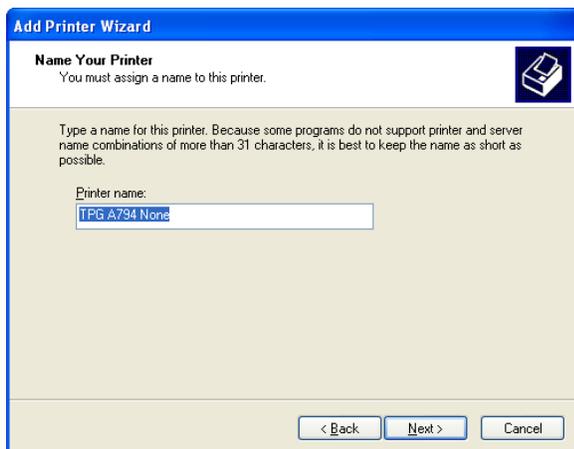

13. Give the printer a name or simply leave the default and select **Next**.



14. Select **Do not share this printer** and select **Next**.

15. Select **Yes** to print a test page and select **Next**.

16. Select **Finish**.




17. Select **Continue Anyway**.




18. During the install it might stop, and ask you to locate the file **A794.dll** file which is located with the rest of the install files.

19. Select **Browse** and select the folder that you extracted the install files to.

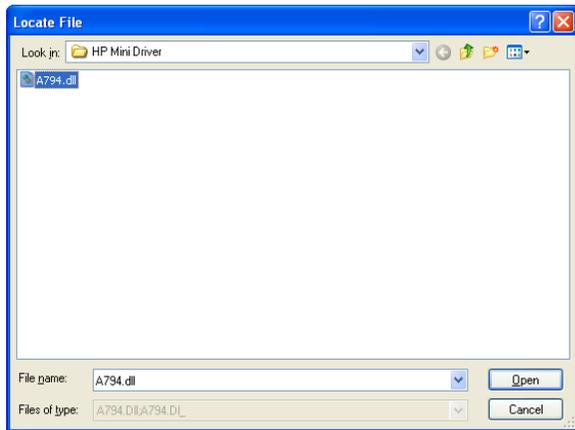

20. Select the **A794.dll** file and select **Open**.



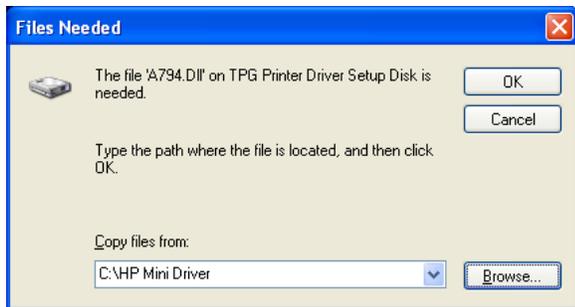


21. Select **Ok**.

Now the printer installation is finished and you should have a test page printed.

Configuration of Installed Driver Files

When the driver gets installed, a .GPD file will end up somewhere in WINDOWS\SYSTEM32\... (or equivalent). You can do a search for it. It will have the form "ta794*.gpd" (where the asterisk is a wildcard character). These GPD files contain information about the driver in text-readable form, and can be edited with MS Notepad.

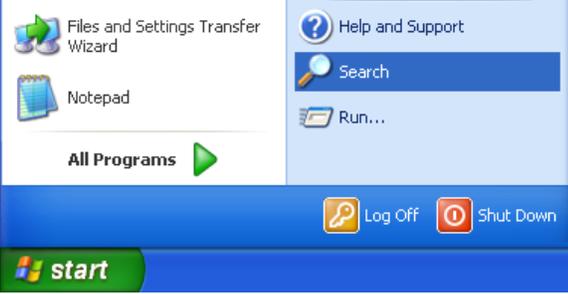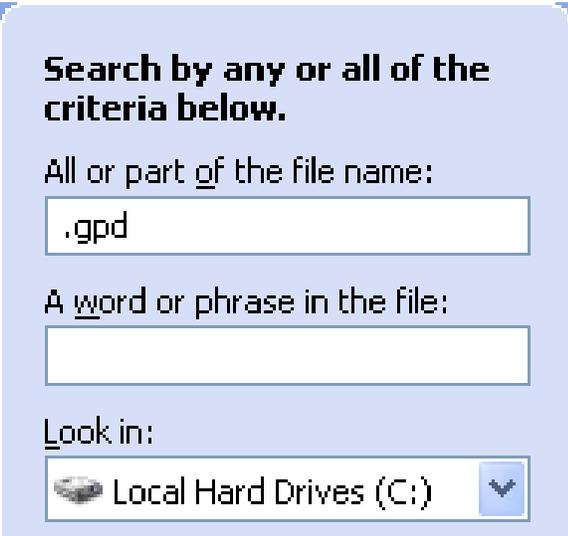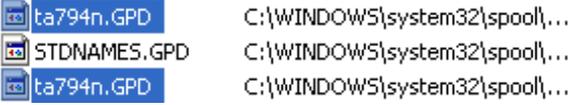	<ol style="list-style-type: none"> 1. You can search for the files that need to be edited by first selecting start and then selecting Search.
	<ol style="list-style-type: none"> 2. In the search dialogue box select All files and folders.
	<ol style="list-style-type: none"> 3. For the filename enter .GPD and windows will search for all files with the extension .GPD. Make sure that Local Hard Drives (C:) is selected under Look in:.
	<ol style="list-style-type: none"> 4. In the search results look for the location C:\WINDOWS\system32\spool\... and the filename that begins with ta794... (there may be more than one). Open the file using note pad and edit it using the instructions below.

Towards the end of the GPD file you will find this line:

- *Command: CmdCR { *Cmd : "<0D>" }

Replace the (0D) with a null (00), (e.g.)

- *Command: CmdCR { *Cmd : "<00>" }

Towards the end of the GPD file you will also find this line:

```
*Command: CmdEndJob
{
    *Order: JOB_FINISH.1
    *Cmd: "<0D0D0D0D0D0D1B>J<A0>"
}
```

Replace these with (e.g.)


```
*Command: CmdEndJob
{
    *Order: JOB_FINISH.1
    *Cmd: "<1B>J<0>"
}
```

Do the same for CmdEndPage (e.g.)

```
*Command: CmdEndPage
{
    *Order: PAGE_FINISH.1
    *Cmd: "<1B>J<0>"
}
```

A sample .GPD file (with the edits) is included with the install files in the folder Sample GPD File (ta794n.GPD is the sample file name).

How to configure HP Hardware (receipt printer and cash drawer) in CRE/RPE

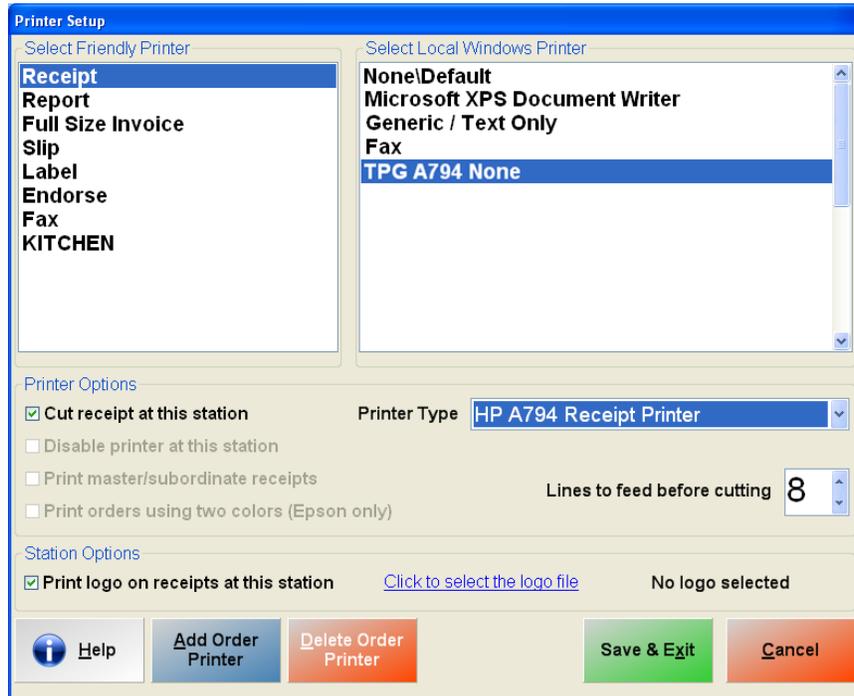

1. Within CRE/RPE go to **Manager/Options** and enter the administrator password (where applicable).
2. Select **Setup**.
3. Select **Friendly Printer Setup**.
4. Highlight **Receipt** from the options on the left (**Select Friendly Printer**).
5. Highlight the appropriate HP receipt printer (**TPG A794 None**) from the top right (**Select local Windows printer**).
6. Under **Printer Type** select **HP A794 Partial**.
7. Select **Print logo on receipts at this station** then select the logo file you would like to print on receipts (if applicable).

Note: The Pixel aspect ratio for the logo must be 1:3 (i.e. if the image has a 100px height then the width must be 300px). If the image you are using is not in that aspect ratio then it will be distorted.

8. Finally select **Cut Receipt at this Station** and then **Save & Exit** to commit changes.

Setup Screen

Account Control | Company Info | Couponing | **Hardware** | Internet Features | Inventory | Invoice Settings

Payment Processing | Quick Invoicing & Alerts | Quick-Add | Receipt | Reports

Restaurant Features | Station Specifics | System Access | Touch Screen

Page 1 | Page 2 | Page 3

Pole Display Port

None
 COM1
 COM2
 COM3
 COM4
 COM5
 USB
 Other

Pole Display Type

General
 Casio / Touch Dynamic
 Virtual(Classic)
 Posiflex
 Toshiba
 OPOS
 Virtual(New)

OPOS Pole Display
PoleDisplay Port
NONE

PinPad Port

None
 COM1
 COM2
 COM3
 COM4
 COM5
 COM6
 Other

PinPad Type
None

PinPad Connection
USB

PinPad IP Address

PinPad IP Port
0

Weight Scale - Primary

None
 COM1
 COM2
 COM3
 COM4
 COM5
 COM6
 Other

Primary Scale Type
CAS PD-1 or PD-2

Weight Scale - Secondary

None
 COM1
 COM2
 COM3
 COM4
 COM5
 COM6
 Other

Secondary Scale Type
CAS PD-1

Cash Drawer

Cash Drawer
 Open Default Drawer
 Open Employee Drawer

Default Cash Drawer Port
USB Receipt Printer

Check drawer open status (Epson TM-T88 only)

Scale **Update** **Exit**

1. Within CRE/RPE go to **Manager/Options** and enter the administrator password (where applicable).
2. Select **Setup**.
3. Select **Setup Screen**.
4. Select the **Hardware** tab.
5. Under **Page 1** Select **USB Receipt Printer** for the **Default Cash Drawer Port**.
6. Finally select **Update** to commit changes.