

Toshiba Tec Pole Display Installation



Remove the back cover of the terminal. To remove the cover, squeeze in on the two notches on either side of the lower part of the cover and gently lift up and out to remove the cover.



1. Before installation of the pole display (after removing the back cover) the top cover must also be removed, which can be done by unlatching the two catches located at the bottom of the top cover, then slide it out before lifting the top cover up.



Customer display connector

2. Connect the customer display cable by attaching the connector to the connector on the I/O PC Board.




3. The customer display comes with a unique top cover that is needed in order to fit the optional Pole Display.





4. Install the optional customer display unit, reversing the steps in step 1.

Configuration in CRE/RPE

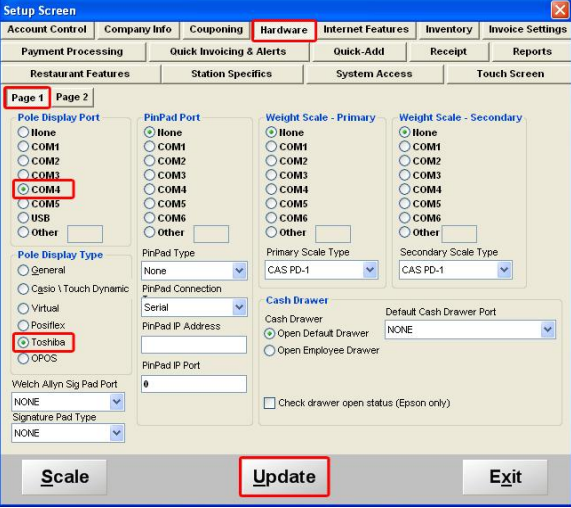

The screenshot shows the 'Setup Screen' window with the 'Hardware' tab selected. The 'Page 1' tab is also highlighted. The 'Pole Display Port' section has 'COM4' selected. The 'Pole Display Type' section has 'Toshiba' selected. The 'Update' button is highlighted with a red box.

1. Start the RPE/CRE program.
2. Select the **Options/Manager** and enter your password (where applicable).
3. Select **Setup** and then **Setup Screen**.
4. Select the **Hardware** tab and then **Page1**.
5. Under **Pole Display Port** select the port **COM4**.
6. Under **Pole Display Type** select **Toshiba**.
7. Select **Update** to save your changes.