

One Blue Hill Plaza, 16th Floor, PO Box 1546
Pearl River, NY 10965
1-800-PC-AMERICA, 1-800-722-6374
(Voice) 845-920-0800 (Fax) 845-920-0880

Sharp RZ-X650 Installation Guide



This document provides step-by-step instructions for setting up your Sharp RZ-X650 system, which contains the following components: The RZ-X650 Terminal, the integrated Pole Display, the integrated MSR.

Hardware Ports

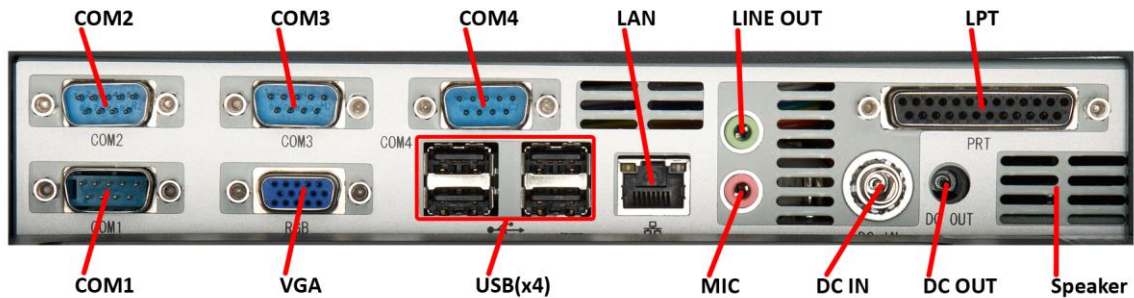

COM1:	Serial Port	LINE OUT:	Speaker Audio Connection
COM2:	Serial Port	MIC:	Microphone Audio Connection
COM3:	Serial Port (RESERVED for Optional Pole Display)	DC IN:	Computer Power Connection
COM4:	Serial Port	DC OUT:	Peripheral Power Connection (Optional)
VGA:	Open	LPT:	LPT Printer Connection
USB Ports (x4):	These Ports can be used to connect any USB Peripheral.	Speaker:	Chassis Speaker
LAN:	Internet will Connect Here		

Installing the Optional Pole Display



1. Place the RZ-X650 terminal, screen side down.

Note: It is recommended to have a clean surface to work on. It is also recommended to place a towel down so that the screen does not get scratched.



2. Remove the four screws holding the stand in place.



3. Route the cable for the optional pole display through the stand, as pictured left.



4. Replace the four screws holding the stand in place.



5. Attach the four screws to secure the optional pole display to the stand.




6. Connect the optional pole display to the port labeled **COM3**. This connection is reserved for the pole display.




7. Move the RZ-X650 terminal to the normal operating position.

Configuring CRE or RPE to Communicate with the Pole Display

To configure CRE or RPE to communicate with the Pole Display, open CRE or RPE, select **Manager**, provide the requested credentials, and follow these steps.

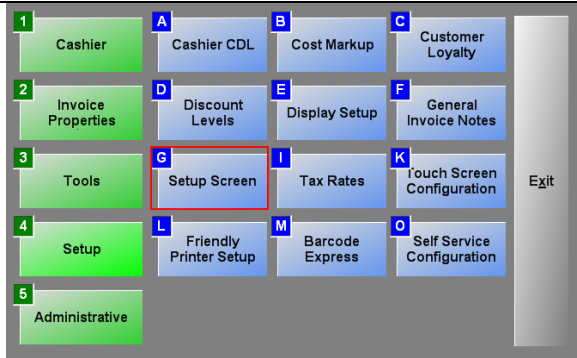

1. Select **Setup** then select **Setup Screen**.

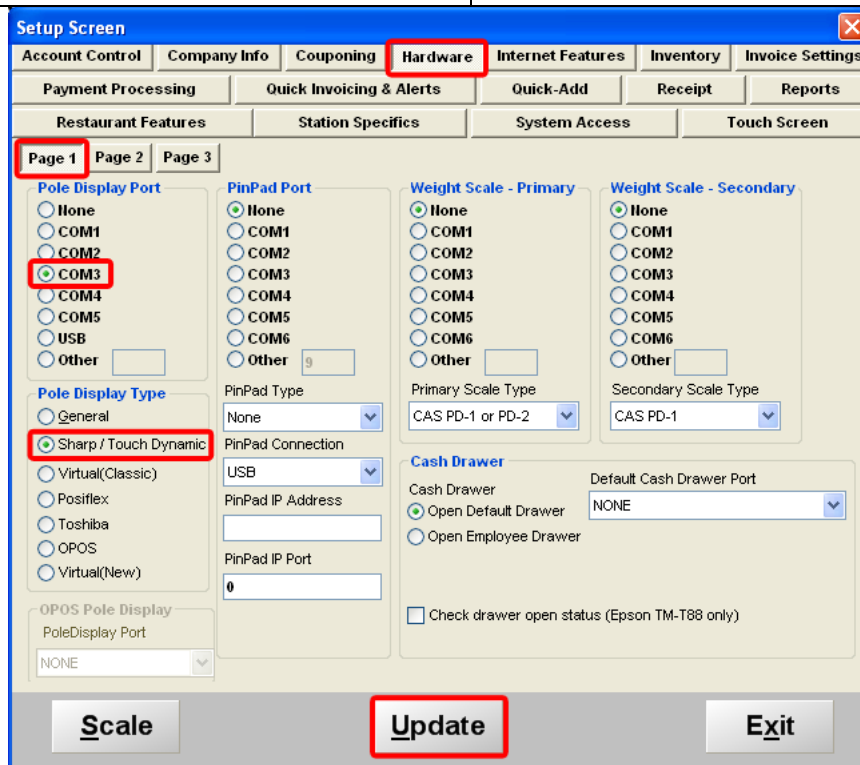

2. Select the **Hardware** tab, under **Page 1**:
3. Under **Pole Display Port** select **COM3**.
4. Under **Pole Display Type** select **Sharp / Touch Dynamic**.
5. Select **Update**.